

### 100% Solid Brick at Corners

# MASONRY PROJECT #10

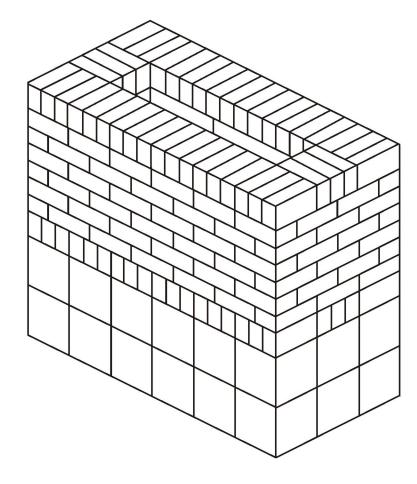

# Bon Tool Co.

Gibsonia, PA 15044 • USA • 724-443-7080 • www.bontool.com

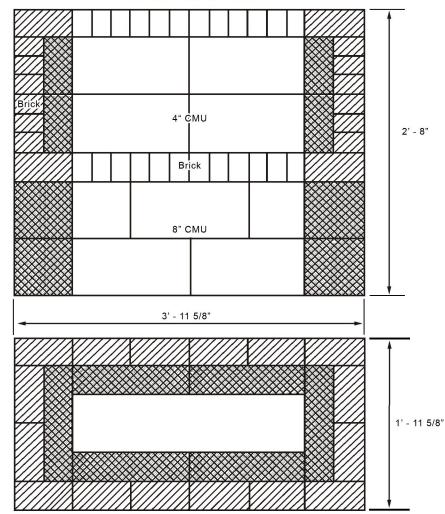

Bon Tool Co. does not guarantee the accuracy of the data. Please report errors and submit suggestions to Bon Tool Co.

# **INSTRUCTIONS**

- Build wall as shown.
- 2. First course of brick to be used to level project and will not be considered in judging.
- 3. Brick coursing to be 3 in 8" from top of first course up.
- 4. Fill all head, bed and collar joints.
- 5. Both sides and ends to be finished with concave joint.
- 6. Cleaning to be by brushing only.

# **MATERIALS REQUIRED**

- 1. 14 8" CMU
- 2. 12 4" CMU
- 3. 172 Modular Brick
- 4. 8 100% Solid Brick