


# 4400 Series Earth Augers

## Pengo-Type Boring Head Configurations

The 4400 Series earth augers are designed for use with the General 330 Series Two Man Hole Digger. Augers feature either the time-proven, CSA Type boring head configurations or the new LDBH Type in popular diameters. The LDBH boring heads feature one-piece steel casting configuration and the SB26 Screw Bit. Teeth are set at optimum positions to maximize digging performance. A wide range of optional teeth are available for use with specific digging applications. Augers feature the industry standard 36 inch (914 mm) effective digging length and size-specific hexagon connection.

Pengo-type boring head configurations offer excellent digging performance for small, hand-held type hole digging products when drilling in tough soil classifications such as sandstones, fractured limestones, caliche, compacted clays and rubbles.

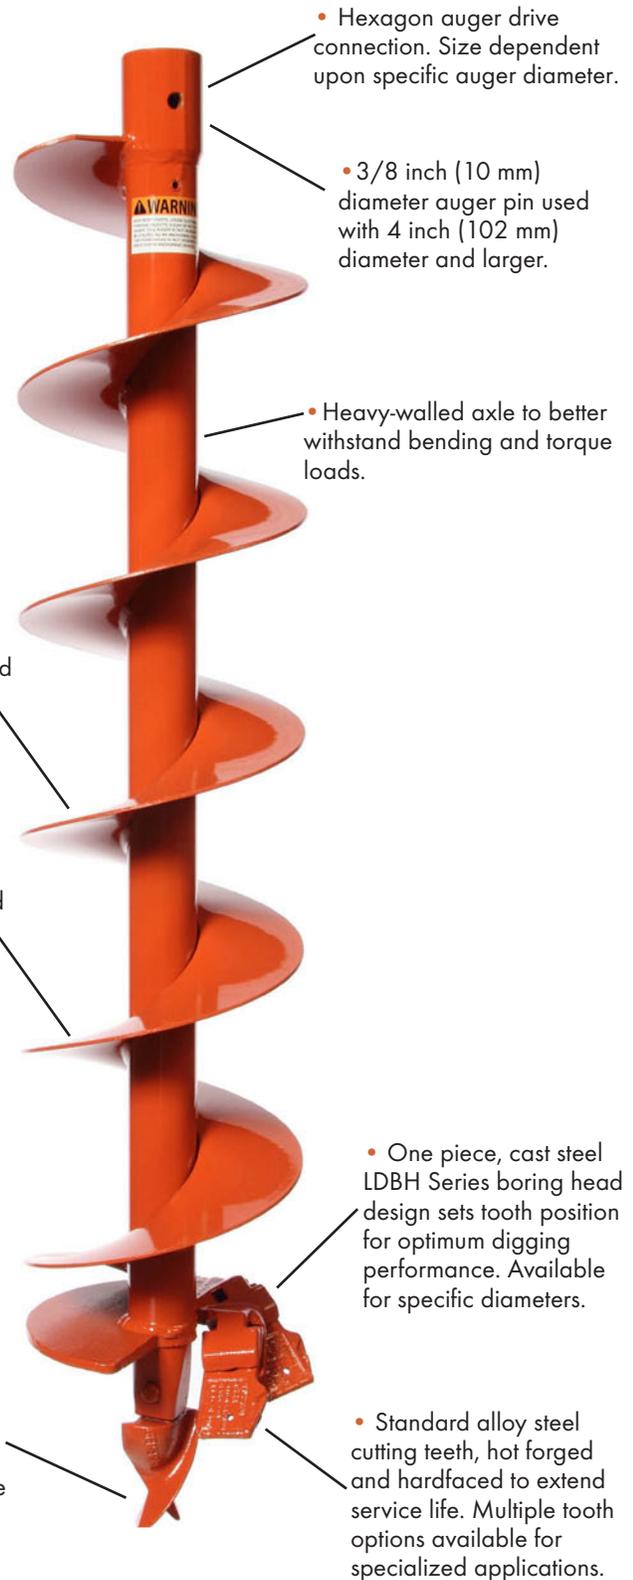


# 4400 Series Earth Augers



## Penge-Type Boring Head Configurations

General Part Number	Nominal Diameter	Actual Cutting Diameter	Effective Digging Depth	Drive Connection	Boring Head Configuration	Shipping Weight
4400-2E3	2-1/4 in (57 mm)	2.5 in (64 mm)	36 in (914 mm)	13/16 in (21 mm) hex	CSA Type	9 lbs (4 kg)
4400-3E3	3-1/4 in (83 mm)	3.5 in (89 mm)	36 in (914 mm)	1-1/8 in (29 mm) hex	CSA Type	14 lbs (6 kg)
4400-4E3	4 in (102 mm)	4.5 in (114 mm)	36 in (914 mm)	1-3/8 in (35 mm) hex	CSA Type	19 lbs (9 kg)
4450-6E3	6 in (152 mm)	7.5 in (191 mm)	36 in (914 mm)	1-3/8 in (35 mm) hex	LDBH Type	25 lbs (11 kg)
4450-8E3	8 in (203 mm)	9.5 in (241 mm)	36 in (914 mm)	1-3/8 in (35 mm) hex	LDBH Type	30 lbs (14 kg)
4450-10E3	10 in (254 mm)	11.5 in (292 mm)	36 in (914 mm)	1-3/8 in (35 mm) hex	LDBH Type	35 lbs (16 kg)
4450-12E3	12 in (305 mm)	13.5 in (343 mm)	36 in (914 mm)	1-3/8 in (35 mm) hex	LDBH Type	44 lbs (20 kg)
4400-14E3	14 in (356 mm)	15.5 in (394 mm)	36 in (914 mm)	1-3/8 in (35 mm) hex	CSA Type	55 lbs (25 kg)
4400-16E3	16 in (406 mm)	17.5 in (445 mm)	36 in (914 mm)	1-3/8 in (35 mm) hex	CSA Type	60 lbs (27 kg)
4400-18P*	18 in (458 mm)	19.5 in (495 mm)	36 in (914 mm)	1-3/8 in (35 mm) hex	CSA Type	56 lbs (25 kg)
5500-15X	No Flighting	N/A	15 in (381 mm)	1-3/8 in (35 mm) hex	N/A	8 lbs (4 kg)

Dimensions and weights depicted are for reference only

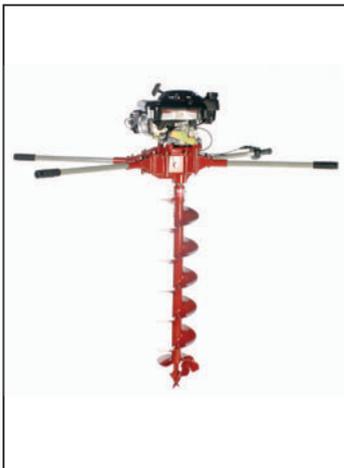

330H Hole Digger



330H Hole Digger



5500-15X Plain Shaft Auger Extension

All specifications are general in nature and are not intended for specific application purposes. General Equipment Company reserves the right to make changes in design, engineering, or specifications and to add improvements or discontinue manufacture at any time without notice or obligation. Consult applicable Operator Manual before utilizing. Names depicted are the registered trademarks of their respective owners.

Form: GEF12111301

620 Alexander Drive SW  
 P.O. Box 334  
 Owatonna MN, 55060 USA  
 Ph. +1.507.451.5510/800.533.0524  
 Fax +1.507.451.5511/877.344.4375  
 sales@generalequip.com

[www.generalequip.com](http://www.generalequip.com)

